

## INSTALLATION INFO for DNA P-AP45S24-0R air filter

### Compatible with Aprilia RS457

The DNA High Performance filter **P-AP45S24-0R** is designed to replace the OEM air filter of the Aprilia RS457.

1. Remove the airbox lid and the OEM air filter.
2. Remove the lower part of the airbox and the ram -air intake assembly.
3. Remove the OEM clamps that secure the rubber intakes to the throttle bodies.
4. Unscrew and remove the ram -air intake from the lower part of the air -box.
5. Install the DNA **P-AP45S24-0R** from the outer side of the airbox to the inner side.

**ATTENTION: Please check the instructions that are inprinted on the filter regarding the direction of installation.**


6. Screw the ram-air to the airbox with the DNA filter in between.
7. Install the assembly and use the supplied DNA clamps to secure the rubber intakes to the throttle body.
8. Install the air -box lid.

Fuel injection recalibration is recommended in order to take full advantage of the air flow increase and avoid the engine running lean!

Service every 10,000 km. Use the dedicated DNA Service Kit DSK-3001 (sold separately) to clean and re-oil, following the instructions included with the service kit.

The manufacturer and seller make no warranties express or implied which extend beyond the description of the goods contained herein.

Any description of this product is for the purpose of identifying it and shall not be deemed to create an express warranty.

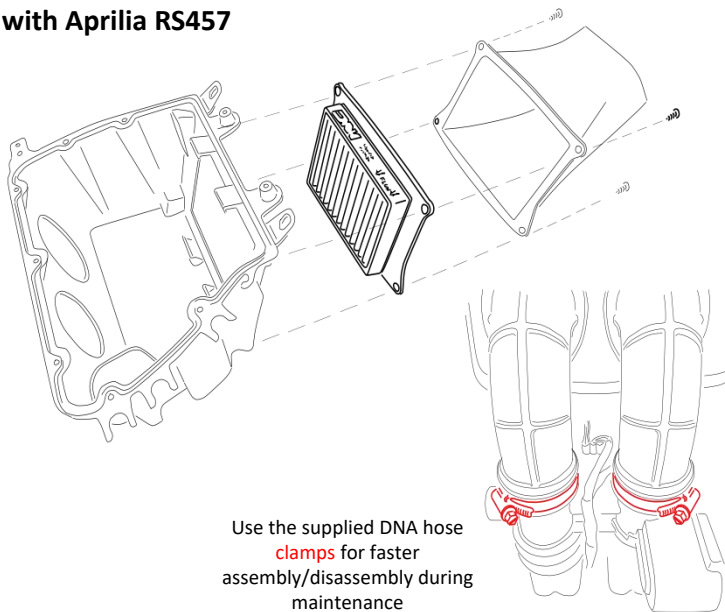

Use the supplied DNA hose  
**clamps** for faster  
assembly/disassembly during  
maintenance

**DNA**®  
HIGH PERFORMANCE FILTERS